

CUSTOMER SPECIFICATIONS

\*\*\* SAME FOR REORDERING \*\*\*

\*\*\* CODE # 286676 \*\*\*

JE PISTONS

15312 CONNECTOR LANE  
HUNTINGTON BEACH, CA. 92649

DATE 10/04/10

(714)898-9763

ATV UNLIMITED

PO # JAMES

ACC # 7993

740/625-5549

3575 DILL RD  
CENTERBURG OH 43011

MOTOR TYPE PISTON PART # 286676 quantity  
HEAD DESC. YAMAHA MISC  
DISPLACEMENT YAMAHA  
PISTON TYPE DISH-Flat Bot  
BORE 3.2677 (83.00mm)  
STROKE

ROD LENGTH  
DISH DEPTH .020 (.51mm)  
COMP. DIST .876 (22.25mm)  
Int .145 (3.68mm) 17.5Deg  
Exh .165 (4.19mm) 12.5Deg  
Valve Pocket depth measured from Deck


IMPORTANT  
CLEARANCE INFORMATION  
GUIDELINES ONLY  
Set Clearance to .0015 (.04mm)  
Some applications may require more  
clearance. Measure piston diameter  
.275(7mm) from bottom of piston skirt

CORRECT PISTON INSTALLATION IS THE  
RESPONSIBILITY OF THE CUSTOMER

	Groove	Land
TOP	.0397 (1.01mm)	.220 (5.59mm)
2ND	.040 (1.02mm)	.101 (2.57mm)
OIL	.0795 (2.02mm)	.065 (1.65mm)

PIN DIA .630 (16.00mm)  
PIN LENGTH 1.650 (41.91mm)  
JE .050 Wire Locks

ACTUAL WEIGHT 207 GRAMS .275(7mm)

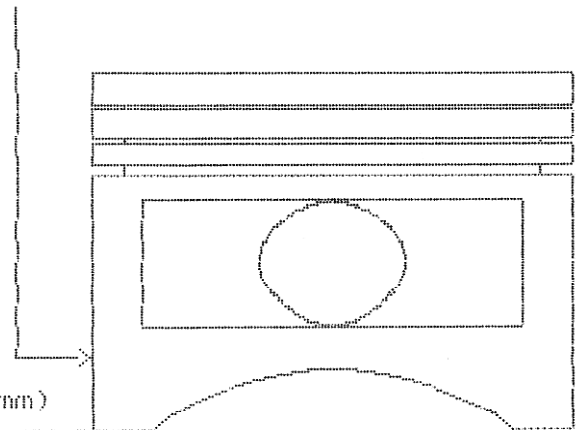

ALL SPECIFICATIONS ARE SUBJECT  
TO MANUFACTURERS TOLERANCES